



DEC 2004



10/21 308

PCT/GB 2003 / 0 0 2 6 4 6



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 21 JUL 2003	
WIPO	PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

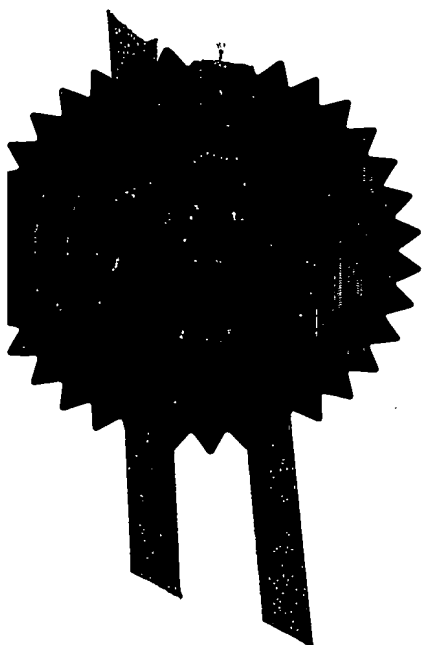

Signed 

Dated 4 July 2003

BEST AVAILABLE COPY

Patents Form 1/77

21 JUN 2002

Patents Act 1977
(Rule 16)

RECEIVED BY FAX

23JUN02 E727713-1 C83365
P01/7700 0.00-0214355.0**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

21 JUN 2002

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ**1. Your reference**

P2630/1/GB

2. Patent application number*(The Patent Office will fill in this part)*

0214355.0

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Rockwood Additives Limited
a company registered in England
P. O. Box 2
Moorfield Road
Widnes
Cheshire WA8 0JU 84 08643001Patents ADP number *(If you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Synthetic magnesium silicate compositions and process for the production thereof

5. Name of your agent *(If you have one)**"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)*Castles
1 King Street
Bakewell
Derbyshire DE45 1DZPatents ADP number *(If you know it)*

7336522002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(If you know it)* the or each application number

Country

Priority application number
*(If you know it)*Date of filing
*(day / month / year)***7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application**

Number of earlier application

Date of filing
*(day / month / year)***8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:***

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

14

Claim(s)

3

Abstract

1

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

G. J. Buckley
CASTLES

Date

21st June 200

12. Name and daytime telephone number of person to contact in the United Kingdom

G J Buckley 01629-813505

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Synthetic magnesium silicate compositions and process for the production thereof

This invention is concerned with synthetic magnesium silicate compositions and a process for the production thereof.

5

With the name "hectorite" has been ascribed to a natural trioctahedral smectite found at Hector, California, USA. This clay is an hydrous magnesium silicate having the ideal composition $\text{Si}_8\text{Mg}_6\text{O}_{20}(\text{OH})_4$ modified by having a portion of the Mg^{+2} and OH^- ions replaced by Li^+ and F^- ions.

10

The synthesis of hydrous magnesium silicates similar to natural hectorite has been described by Granquist and Pollack in "Clays and Clay minerals" Vol. 8 (Proceedings of the 8th National Conference on Clays and Clay Minerals) pages 150-169. In the process described by Granquist, gels of magnesium hydroxide and of silica are produced separately, are washed, are combined and are redispersed in water to form a suspension. Lithium hydroxide or lithium fluoride and sodium hydroxide are added to the suspension that is then treated hydrothermally by refluxing it with stirring until a product having a crystal structure similar to that of hectorite is formed.

15

20 While Granquist's product has the crystal structure similar to natural hectorite it does not have good rheological properties. Measuring the Bingham Yield Value of an aqueous dispersion of the substance provides a standard yardstick of rheological properties of a substance. The term Bingham Yield Value (also known as Bingham Yield Stress, these terms being alternatives for the same property) is referred to in standard works on rheology for example in "Rheology Theory and Applications" F R Eirich (Acad. Press) Vol. 1 (1956) page 658 and "Colloidal Dispersions" L K Fisher (N.Y. Bureau of Standards) 2nd Edition 1953, pages 150-170 and "The Chemistry and Physics of Clays and other Ceramic Materials" 3rd Edition, page 463, A B Searle and R W Grimshaw.


25

30 The Bingham Yield Value may be determined by first obtaining a flow curve relating the shear stress to the rate of shear and then extrapolating the straight line section of the curve to the shear stress axis, the intercept being the Bingham Yield Value. It can conveniently be determined on any viscometer capable of measuring a range of shear rates and shear stresses.

The product of Granquist, when in the form of a dispersion obtained using 2g silicate and 100ml tap water, gives a Bingham Yield Value of only about 15 dynes per cm². This is a very low value, inferior to that given by natural hectorite. It's also gives a low static gel strength.


Processes for the production of synthetic hydrous magnesium silicate compositions having a crystal structure similar to natural hectorite but having better rheological properties than natural hectorite have been described in GB-A-1054111, GB-A-1213122 and GB-A-1432770.

The process described in the GB-A-1054111 involves forming a slurry by co-precipitation by slowly combining with heating and agitation in an aqueous medium a constituent providing the magnesium ions with constituents providing the silicon (as silicates), hydroxyl and sodium ions and treating the precipitate hydrothermally to crystallise the synthetic mineral-like clay, washing and dewatering the resulting crystallised product, and drying the product at a temperature up to 450°C. The concentration of the slurry is desirably such that the concentration of the product formed is from 1% to 8% by weight, preferably 4% by weight. The hydrous magnesium silicate contains fluorine and lithium. The clay-like minerals provided have the structural formula:




in which x is between 0 and 6, y is from 1 up to but excluding 4, and M is a cation. Li⁺ may be replaced by Na⁺.

The process described in GB-A-1213122 involves precipitating a magnesium silicate by combining an aqueous solution of a water soluble magnesium salt with an aqueous alkaline solution of one or more sodium compounds in the presence of dissolved silicon compound and hydrothermally treating the precipitate under pressure to crystallise the synthetic mineral-like clay, separating the resultant solid and liquid phases, washing the resulting crystallised product, and drying the product. The concentration of the precipitate is preferably not more than 5% by weight. The hydrous magnesium silicate product contains no fluorine, optionally contains lithium and has the general formula:



where (i) M is a sodium, a lithium or an equivalent of an organic cation, and (ii) the value of a, b, and c is such that either $a < 6$, $b > 0$, $c > 0$, $b + c < 2$, and $(a + b + c - 6) < 2$; or $a < 6$, $b = 0$, $c = 2$ and $(a + c - 6) < 2$.

- 5 The process described in GB-A-1432770 involves the synthesis of an hydrous magnesium silicate having a crystal structure similar to that of hectorite and having the general formula:



- wherein a is 4.95 to 5.7, b is from 0 to 1.05, c is from 0 to <2, $a + b + c$ is from >4 to <8, y is from 0 to <4, $z = 12 - 2a - b - c$, and M is Na^+ or Li^+ . The process comprises the sequential steps
- 10 of forming an aqueous suspension of magnesium carbonate, forming a silica precipitate in the aqueous suspension magnesium carbonate, the proportions of magnesium provided by the magnesium carbonate and silica precipitated in the suspension corresponding to that of the formula of the magnesium silicate, maintaining the resulting mixture of magnesium carbonate and silica in the wet state and subjecting it to hydrothermal treatment by heating it in an
- 15 aqueous medium and in the presence of the remaining constituents of the magnesium silicate in proportions within the ranges specified in the general formula and in the presence of excess dissolved sodium or lithium compound over that required to form the cation of the magnesium silicate until crystal growth occurs and separating the resulting crystalline product. The crystalline material resulting from the hydrothermal treatment is the separated
- 20 by filtration, washed, and dried at a temperature not exceeding 450°C. The process described in GB-A-1432770 is distinguished from the processes described in GB-A-1054111 and GB-A-1213122 in that, in those processes, the Mg compound and the silica are co-precipitated.

- The products of the processes described in the above prior art documents are characterised by
- 25 providing dispersions having Bingham Yield Values substantially in excess of any known to be given by natural hectorite dispersions. However, it is known that small modifications of the composition of the prior art synthetic magnesium silicates or of the formulation of dispersions comprising such silicates can have significant deleterious effects upon these rheological properties.

30


Some of the prior art products have found widespread use, by virtue of their excellent rheological properties, in many applications, including in paints; cosmetic products; shampoos; detergents; disinfectants; toothpastes; paper manufacture, for example as fillers,

retention and drainage aids, and in paper coatings; and drilling muds. The products of the above processes are commercially available as dry white powders, such as the products sold by Rockwood Additives Limited, England, under the trade mark "LAPONITE". When fully dispersed and hydrated in water, the resulting composition is colourless and transparent.

When the products of the above processes are dispersed in paraffin wax, however, there is a tendency for the wax dispersion to discolour over a period of time.

It is an object of the present invention to provide synthetic magnesium silicate compositions that have similar colour and rheological properties as the prior art products but which, when dispersed in paraffin wax, exhibit reduced or eliminated discoloration of the wax dispersion. It is a further object of the present invention to provide a process for the preparation of such synthetic magnesium silicate compositions.

In accordance with the first aspect of present invention there is provided a synthetic magnesium silicate composition of the formula:




wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is a cation, n is the valency of the cation M, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w. Preferably a is between 5.30 and 5.68. Most preferably a is between 5.42 and 5.55, and z is less than 2 % w/w. M is preferably selected from Na, K, Li, an organic cation, such as a quaternary ammonium anion eg $\{\text{R}_2(\text{CH}_3)_2\}^+$, where R is C_{14} to C_{22} , preferably C_{18} , alkyl, and mixtures thereof. More preferably M is selected from Na, Li and mixtures thereof. Most preferably M is Na.

As only small modifications of the composition of the prior art synthetic magnesium silicates or of the formulation of dispersions comprising such silicates can have significant deleterious effects upon the rheological properties of compositions, it is surprising to find that the synthetic magnesium silicate compositions of the present invention have retained colour and rheological properties as the prior art products and, importantly, demonstrate a significantly reduced, if not eliminated, discoloration effect on wax dispersions.

Whilst the physical make-up of the compositions of the present invention is not fully understood, it is believed that of the compositions are complex, intimate, amorphous/crystalline blends of the relevant defined constituents. Accordingly, the above formula should be determined at the micro level. In other words, the compositions of the present invention are not simple dry blends of the defined constituents having a formulation corresponding to the above formula but determined at the macro level. Indeed, a dry blend of the relevant constituents having a formulation corresponding to the above formula when determined at the macro level, even when micronised to reduce the mixture particle size to less than 20 microns, simply does not demonstrate the advantages of the present invention, i.e. paraffin wax dispersions comprising such a simple blend will tend to discolor or yellow.

In another aspect of the present invention, there is provided a process for the preparation of a synthetic magnesium silicate composition of the formula:



wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is a cation, n is the valency of the cation M, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w. Preferably a is between 5.30 and 5.68. Most preferably a is between 5.42 and 5.55, and z is less than 2%w/w. M is preferably selected from Na, K, Li, an organic cation, such as a quaternary ammonium anion eg $\{\text{R}_2(\text{CH}_3)_2\}^+$, where R is C_{14} to C_{22} , preferably C_{18} , alkyl, and mixtures thereof. More preferably M is selected from Na, Li and mixtures thereof. Most preferably M is Na.

In both the composition and the process of the invention, it will be appreciated by a person skilled in the art that $a + b$ may be less than or equal to 6.

In a first embodiment of the process of the invention, the process consists essentially of the following sequential steps:

- (i) forming an aqueous suspension of magnesium carbonate,
 - (ii) forming a silica precipitate in the aqueous suspension of magnesium carbonate,
- the proportions of magnesium provided by the magnesium carbonate and of silica precipitated in the suspension corresponding to that of the formula of the magnesium silicate,

- (iii) whilst maintaining the resulting mixture of magnesium carbonate and silica in the wet state, subjecting it to hydrothermal treatment by heating it in an aqueous medium and in the presence of the remaining constituents of the magnesium silicate in proportions within the ranges specified in the general formula thereof and in the presence of excess dissolved sodium or lithium compound over that required to form the cation thereof until crystal growth occurs,
- (iv) separating the solid and liquid phases, and
- (v) drying the resultant solid product at a temperature up to 450°C.

10 In a second embodiment of the process of the invention, the process consists essentially of the following sequential steps:

(i) forming an aqueous slurry from

(a) a water-soluble magnesium salt,

(b) sodium silicate,

15 (c) sodium carbonate or sodium hydroxide and

(d) material delivering lithium and fluoride ions selected from the group consisting of (A) lithium fluoride and (B) a lithium compound in conjunction with hydrofluoric acid, fluosilicic acid, sodium silicofluoride or sodium fluoride, such that in the slurry the following atomic ratios are present

20
$$\frac{\text{Si}}{\text{F}} = 0.5 \text{ to } 5.1$$

$$\frac{\text{Li}}{\text{Mg}} = 0.1 \text{ to } 1.0$$

25
$$\frac{\text{Si}}{\text{Mg} + \text{Li}} = 0.5 \text{ to } 1.5$$

$$\frac{\text{Na}}{2 \text{ Mg} + \text{F-Li}} = 1.0 \text{ to } 2.0$$

the aqueous slurry being formed by co-precipitation by slowly combining the said magnesium salt and the said sodium silicate and the said sodium carbonate or sodium hydroxide, with heating and agitation, in an aqueous medium which contains the said material or materials delivering the lithium and fluoride ions;

30 (ii) taking the aqueous slurry so formed and, without washing free from soluble salts, hydrothermally treating it for about 10 to 20 hours until crystal growth occurs,

(iii) separating the solid and liquid phases, and

(iv) drying the resultant solid product at a temperature up to 450°C.

In a third embodiment of the process of the present invention, the process consists essentially of the following sequential steps:

- 5 (i) precipitating a magnesium silicate having the value of "a" desired in the said composition by combining an aqueous solution of a water soluble magnesium salt with an aqueous alkaline solution of one or more sodium compounds in the presence of dissolved silicon-delivering material, the pH of the alkaline solution being maintained at 8 to 12.5 throughout,
- 10 (ii) without first drying or washing this precipitate heating it to a temperature of at least 170 °C. and the pressure of at least 6.9 bar (100 psi), the temperature being less than 370 °C. and such that a liquid phase is present, until crystal growth occurs,
- (iii) separating the resultant solid and liquid phases, and
- 15 (iv) drying the resultant solid product.

The compositions of the present invention retain similar rheological properties to the products formed in GB-A-1054111, GB-A-1213122 and GB-A-1432770. The compositions may be
20 supplied as dry white powders or as moist solids or in dispersions. Accordingly, the compositions the present invention may be used in the same type of applications as the prior art products. For example, the compositions may be used in paints; cosmetic products; shampoos; detergents; disinfectants; toothpastes; paper manufacture, for example as fillers, retention and drainage aids, and in paper coatings; and drilling muds. Such compositions
25 have the advantage over the prior art products because do not yellow or discolour paraffin wax when dispersed therein.

The following examples illustrate aspects of the invention, but are not in any way intended to limit the scope the invention.

30

Example 1 – Preparation of compositions of the present invention

Various compositions of the present invention, as set out in Table 1, can be prepared by the following process. To determine the amounts of, for example, lithium carbonate, magnesium sulphate, sodium silicate, and sodium carbonate employed in the process reference should be made to the formula of the desired synthetic magnesium silicate. (Should a fluorine containing product be desired, reference should first be made to the formula of the desired synthetic magnesium silicate to determine the quantity of fluorine needed in the desired synthetic magnesium silicate, and the quantity of a suitable fluorine containing material required for the process can then be determined.)


10 A measured quantity of lithium carbonate and water (sufficient to dissolve the measured quantity of lithium carbonate) is placed in a flask fitted with a stirrer, a heating mantle and a refluxing condenser. In a separate vessel, a measured quantity of magnesium sulphate is dissolved in sufficient water such that the solution was almost saturated and the solution added to the lithium carbonate solution. The mixture was brought to a temperature of at least 15 60°C under reflux while stirring efficiently.

From a separate vessel a measured quantity of sodium carbonate solution is added slowly to the reaction vessel containing the lithium carbonate and magnesium sulphate solution. The addition is made over a period of up to one hour, while the reaction mixture is kept at 60°C or 20 greater and stirred efficiently throughout.

From a separate vessel a measured quantity of sodium silicate solution is added slowly to the reaction vessel containing the lithium carbonate, magnesium sulphate and sodium carbonate solution. The addition is made over a period of up to one hour, while the reaction mixture is 25 kept at 60°C or greater and stirred efficiently throughout.

The mixture is then boiled under reflux, with efficient stirring, for about 2 hours. The mixture is then transferred to a pressure vessel and heated at 202°C or greater for at least 6 hours. After that, it is filtered under vacuum leaving a filter cake that is dried in trays at circa 30 110°C and then ground to a white powder in a small mill.

In the worked examples, where reference is made to Silicate is meant a composition substantially of the formula:



where a is 5.50, b is 0.3, c is 0, d is 0.7, n is 1 and M is Na.

Table 1

% w/w Silicate	% w/w Na ₂ SO ₄	% w/w Na ₂ CO ₃	% w/w H ₂ O
81.54	18.46	0	0
80.27	16.77	2.97	0
79.21	15.36	5.43	0
68.04	31.96	0	0
66.63	28.35	5.02	0
65.51	25.48	9.01	0
79.91	18.09	0	2
78.66	16.43	2.91	2
77.62	15.05	5.33	2
66.68	31.32	0	2
65.30	27.79	4.92	2
64.20	24.97	8.83	2
40.77	9.23	0	50
40.13	8.38	1.48	50
39.60	7.68	2.72	50
34.02	15.98	0	50
33.32	14.18	2.51	50
32.75	12.74	4.51	50
81.87	18.13	0	0
80.57	16.49	2.94	0
79.50	15.12	5.39	0
68.38	31.62	0	0
66.93	28.06	5.00	0
65.78	25.22	8.99	0
80.23	17.77	0	2
78.96	16.16	2.88	2
77.91	14.81	5.28	2
67.01	30.99	0	2
65.60	27.50	4.90	2
64.47	24.72	8.81	2
40.93	9.07	0	50
40.29	8.24	1.47	50
39.75	7.56	2.69	50
34.19	15.81	0	50
33.47	14.03	2.50	50
32.89	12.61	4.50	50
82.03	17.97	0	0
80.72	16.35	2.93	0
79.64	15.00	5.37	0
68.54	31.46	0	0
67.08	27.92	5.00	0
65.92	25.10	8.98	0
80.39	17.61	0	2
79.11	16.02	2.87	2
78.04	14.70	5.26	2
67.17	30.83	0	2
65.74	27.36	4.90	2
64.60	24.60	8.80	2
41.01	8.99	0	50

% w/w Silicate	% w/w Na ₂ SO ₄	% w/w Na ₂ CO ₃	% w/w H ₂ O
40.36	8.18	1.46	50
39.82	7.50	2.68	50
34.27	15.73	0	50
33.54	13.96	2.50	50
32.96	12.55	4.49	50
82.12	17.88	0	0
80.81*	16.27*	2.92*	0*
79.72	14.92	5.35	0
68.64	31.36	0	0
67.17	27.83	4.99	0
66.00	25.02	8.98	0
80.48	17.52	0	2
79.20**	15.94**	2.86**	2**
78.13	14.63	5.25	2
67.27	30.73	0	2
65.83	27.28	4.89	2
64.68	24.52	8.80	2
41.06	8.94	0	50
40.41	8.13	1.46	50
39.86	7.46	2.68	50
34.32	15.68	0	50
33.59	13.92	2.50	50
33.00	12.51	4.49	50
82.18	17.82	0	0
80.87	16.22	2.91	0
79.78	14.88	5.35	0
68.71	31.29	0	0
67.23	27.78	4.99	0
66.05	24.97	8.97	0
80.54	17.46	0	2
79.25	15.89	2.86	2
78.18	14.58	5.24	2
67.33	30.67	0	2
65.89	27.22	4.89	2
64.73	24.47	8.79	2
41.09	8.91	0	50
40.44	8.11	1.46	50
39.89	7.44	2.67	50
34.35	15.65	0	50
33.62	13.89	2.50	50
33.03	12.49	4.49	50
82.33	17.67	0	0
81.01	16.08	2.90	0
79.91	14.76	5.32	0
68.87	31.13	0	0
67.38	27.64	4.98	0
66.19	24.85	8.96	0
80.69	17.31	0	2
79.39	15.76	2.84	2
78.31	14.47	5.22	2
67.49	30.51	0	2

% w/w Silicate	% w/w Na ₂ SO ₄	% w/w Na ₂ CO ₃	% w/w H ₂ O
66.03	27.08	4.88	2
64.86	24.35	8.78	2
41.17	8.83	0	50
40.51	8.04	1.45	50
39.96	7.38	2.66	50
34.44	15.56	0	50
33.69	13.82	2.49	50
33.09	12.43	4.48	50
69.38	30.62	0	0
67.83	27.20	4.97	0
66.60	24.47	8.93	0
81.15	16.85	0	2
79.83	15.36	2.80	2
78.73	14.12	5.15	2
67.99	30.01	0	2
66.48	26.66	4.87	2
65.27	23.98	8.75	2
41.40	8.60	0	50
40.73	7.84	1.43	50
40.17	7.20	2.63	50
34.69	15.31	0	50
33.92	13.60	2.48	50
33.30	12.23	4.47	50
82.80	17.20	0	0
81.46	15.68	2.86	0
80.34	14.40	5.26	0
70.12	29.88	0	0
68.50	26.56	4.94	0
67.20	23.91	8.89	0
81.80	16.20	0	2
80.45	14.80	2.75	2
79.32	13.62	5.06	2
68.71	29.29	0	2
67.13	26.03	4.84	2
65.86	23.43	8.71	2
41.73	8.27	0	50
41.05	7.55	1.40	50
40.47	6.95	2.58	50
35.06	14.94	0	50
34.25	13.28	2.47	50
33.60	11.95	4.44	50
83.47	16.53	0	0
82.09	15.10	2.81	0
80.94	13.90	5.17	0

13

Example 2 – Paraffin Wax Dispersions

Comparative 1

A paraffin wax dispersion was prepared by mixing 100 g of Laponite® RD synthetic hectorite available from Rockwood Absorbents Limited, Widnes, England, in 5 l of hot paraffin wax.

- 5 The dispersion was allowed to cool and then a sample was put into a closed jar, which was then closed and then placed on the laboratory shelf. The jar was not in direct sunlight. After two months, the jar was revisited and it was noted that the sample had turned a pale yellow colour, thereby indicating the discoloration of the dispersion.

10 Comparative 2

A paraffin wax dispersion was prepared by mixing 80 g of Laponite® RD synthetic hectorite available from Rockwood Absorbents Limited, Widnes, England, 18 g of Na_2SO_4 and 2 g of Na_2CO_3 (particle size <10 microns, pre-mixed in microniser) in 5 l of hot paraffin wax. The dispersion was allowed to cool and then a sample was put into a closed jar, which was then

15 closed and then placed on the laboratory shelf. The jar was not in direct sunlight. After two months, the jar was revisited and it was noted that the sample had turned a pale yellow colour, thereby indicating the discoloration of the dispersion.

Invention

- 20 A paraffin wax dispersion was prepared by mixing 100 g of composition ** (as indicated in Table 1) in 5 l of hot paraffin wax. The dispersion was allowed to cool and then a sample was put into a closed jar, which was then closed and then placed on the laboratory shelf. The jar was not in direct sunlight. After two months, the jar was revisited and it was noted that the sample the dispersion was the same colour as it was two months before, thereby indicating no
- 25 discoloration of the dispersion.

Example 3 – Retention Aid

- To demonstrate that the compositions of the present invention retain rheological properties similar to the prior art synthetic silicate compositions, the performances as retention aids of
- 30 the two compositions of the invention * and ** were compared against Laponite RD (a synthetic hectorite available from Rockwood Additives Limited, Widnes, England). The compositions were tested under total first pass retention conditions, a standard procedure well known in the papermaking industry. When used in combination with a commercially


available high molecular weight cationic polymeric retention aid, the results in Table 2 indicate that the compositions of the present invention perform as effectively as Laponite RD as a retention aid.

Table 2

Sample	Total First Pass Retention %
Blank – no retention aid	71.8
Polymer 0.22Kg/1000Kg of paper produced	75.7
Polymer 0.22 Kg/1000Kg of paper produced + Laponite RD 0.44 Kg/1000Kg of paper produced	80
Polymer 0.22 Kg/1000Kg of paper produced + Silicate* 0.44 Kg/1000Kg of paper produced	80
Polymer 0.22 Kg/1000Kg of paper produced + Silicate** 0.44 Kg/1000Kg of paper produced	80


Claims

1. A synthetic magnesium silicate composition of the formula:



5 wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is a cation, n is the valency of the cation M, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w.


2 A process for the preparation of a synthetic magnesium silicate composition of the formula:



10 wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is Na or Li, n is 1, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w, the process consists essentially of the following sequential steps:

- (vi) forming an aqueous suspension of magnesium carbonate,
- 15 (vii) forming a silica precipitate in the aqueous suspension of magnesium carbonate, the proportions of magnesium provided by the magnesium carbonate and of silica precipitated in the suspension corresponding to that of the formula of the magnesium silicate,
- (viii) whilst maintaining the resulting mixture of magnesium carbonate and silica in the wet state, subjecting it to hydrothermal treatment by heating it in an aqueous medium and in the presence of the remaining constituents of the magnesium silicate in proportions within the ranges specified in the general formula thereof and in the presence of excess dissolved sodium or lithium compound over that required to form the cation thereof until crystal growth occurs,
- 20 (ix) separating the solid and liquid phases, and
- 25 (x) drying the resultant solid product at a temperature up to 450°C.

3. A process for the preparation of a synthetic magnesium silicate composition of the formula:



wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is Na or Li, n is 1, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w, the process consists essentially of the following sequential steps:

5 (i) forming an aqueous slurry from

(e) a water-soluble magnesium salt,

(f) sodium silicate,

(g) sodium carbonate or sodium hydroxide and

(h) material delivering lithium and fluoride ions selected from the group consisting of

10 (A) lithium fluoride and (B) a lithium compound in conjunction with hydrofluoric acid, fluosilicic acid, sodium silicofluoride or sodium fluoride, such that in the slurry the following atomic ratios are present

$$\frac{\text{Si}}{\text{F}} = 0.5 \text{ to } 5.1$$

$$\frac{\text{Li}}{\text{Mg}} = 0.1 \text{ to } 1.0$$

15

$$\frac{\text{Si}}{\text{Mg} + \text{Li}} = 0.5 \text{ to } 1.5$$

$$\frac{\text{Na}}{2 \text{ Mg} + \text{F-Li}} = 1.0 \text{ to } 2.0$$

20

the aqueous slurry being formed by co-precipitation by slowly combining the said magnesium salt and the said sodium silicate and the said sodium carbonate or sodium hydroxide, with heating and agitation, in an aqueous medium which contains the said material or materials delivering the lithium and fluoride ions;

25

(ii) taking the aqueous slurry so formed and, without washing free from soluble salts,


hydrothermally treating it for about 10 to 20 hours until crystal growth occurs,

(iii) separating the solid and liquid phases, and

(iv) drying the resultant solid product at a temperature up to 450°C.

30

4. A process for the preparation of a synthetic magnesium silicate composition of the formula:



17

wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, $d = 12 - 2a - b$, M is Na or Li, n is 1, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w, the process consists essentially of the following sequential steps:

- 5 (i) precipitating a magnesium silicate having the value of "a" desired in the said composition by combining an aqueous solution of a water soluble magnesium salt with an aqueous alkaline solution of one or more sodium compounds in the presence of dissolved silicon-delivering material, the pH of the alkaline solution being maintained at 8 to 12.5 throughout,
- 10 (ii) without first drying or washing this precipitate heating it to a temperature of at least 170 °C. and the pressure of at least 6.9 bar (100 psi), the temperature being less than 370 °C. and such that a liquid phases present, until crystal growth occurs,
- (iii) separating the resultant solid and liquid phases, and
- (iv) drying the resultant solid product.

15

5. A composition as claimed in claim 1 or process as claimed in any one of claims 2 to 4, wherein a is from 5.30 to 5.68, preferably from 5.42 to 5.55.

20

6. A composition as claimed in claim 1 or claim 5, or process as claimed in any one of claims 2 to 4 or claim 5, wherein z is less than 2.


25

7. A composition as claimed in any one of claims 1 or 5 to 7 or a process as claimed in any one of claims 2 to 4, 5 or 6, wherein M is selected from Na, K, Li, an organic cation, , and mixtures thereof, preferably M is selected from Na, Li and mixtures thereof.

ABSTRACTSynthetic magnesium silicate compositions and process for the production thereof

5

A synthetic magnesium silicate composition of the formula:



10

wherein a is 4.5 to <6.0, b is from >0 to 1.5, c is from 0 to 4, d = 12-2a-b, M is a cation, n is the valency of cation M, w is from 32.8 to 94.7 % w/w, x is from 0.3 to 32.0 % w/w, y is from 0 to 9.0 % w/w, and z is from 0 to 50 % w/w, is useful in paraffin wax dispersions as it does not discolour or yellow such dispersions

15

20

THE PATENT OFFICE

04 JUL 2003

Received In Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.